



Unique airtight framing design for corners without corner posts. Like all lift-slide doors, the lifting function facilitates floor level installations for step-free access.



Specifications

- IV 78mm timber frame, triple glazed with 2x 12-16mm argon filled gap
- IV 68mm timber frame, double glazed with 1x 14-20mm argon filled gap
- Choice of glass combinations
- German lift and slide hardware fittings
- Low VOC spray-painted or stained in the colour of your choice
- Multi-layer seals and night vent
- Suited for bushfire areas up to and including BAL-29, and for Passive House

Size:

- Weight up to 250kg per slider
- Maximum width and height on request

WERS energy rating: U-value from a very low 1.0

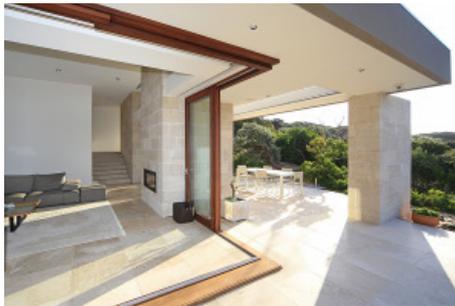


Photo courtesy of Viridian. Photography by Peter Hyatt.