



Technologically advanced sliding doors offer the highest energy efficiency and no drafts through multi-layer seals and engineered lift-slide action. Available in many configurations.





Specifications

- Timber frame thickness IV 68mm
- Pronounced joints
- Double glazed with 1x 14-20mm airgap, depending on glass thickness
- Choice of glass combinations
- Komfort+: low VOC spray-painted or stained in the colour of your choice
- Komfortline: primed and paint ready
- German lift-slide hardware, multi-point locking
- Multi-layer seals to eliminate drafts, night vent
- Suited for bushfire areas up to and including BAL-29


Size:

- Weight up to 300kg per slider
- Width up to 2400mm per slider
- Height up to 2400mm


WERS energy rating: from a very low 1.8

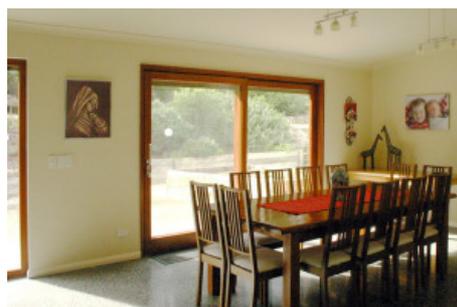


Scheme A



Scheme G



Scheme C



Scheme E